

TARALAY IMPRESSION

gerflor.fr



Gerflor[®]
theflooringroup



Walnut Brown



Herringbone Chatain / Habana Trinidad

TARALAY IMPRESSION



TECHNICAL & DESIGN

SOLUTION



**EXTREME STAIN RESISTANCE,
EASY MAINTENANCE:**

PROTECSOL® 2 surface treatment
(patented technology by Gerflor)



**HIGH TRAFFIC RESISTANCE,
LONG-LASTING APPEARANCE**

with a 0.9 mm wearlayer on demand
(minimum order quantity of 800 sq.m)



**THE BEST ACOUSTIC / INDENTATION
PERFORMANCE ON THE MARKET**

COMPACT: 0.03 mm / 8 dB
COMFORT: 0.08 mm / 19 dB



ULTRA-REALISTIC DESIGNS:

New embosses and new plank dimensions
for wood designs



MATT EFFECT



**ONE COLLECTION DEDICATED
TO ALL MARKETS**

INDEX

| | |
|--------------------------------------|------|
| ■ PHOTO BOOK..... | P.04 |
| ■ PROTECSOL® 2 BENEFITS | P.24 |
| ■ OUR PRODUCT OFFER | P.26 |
| ■ DURABILITY..... | P.28 |
| ■ TECHNICAL DATA..... | P.30 |
| • TECHNICAL DATA SHEET | |
| • PRODUCT DESCRIPTION | |
| • LIST OF NCS & LRV CODES | |
| ■ COMPLEMENTARY RANGES..... | P.34 |
| • WALL SOLUTIONS | |
| • STAIR SOLUTIONS | |
| • ACCESSIBILITY | |
| • SKIRTINGS | |
| • ENTRANCE MATS | |
| ■ ECO-RESPONSIBLE SOLUTION | P.36 |
| ■ SERVICES..... | P.38 |

The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.

**ALL COLOURS
AVAILABLE AS
COMFORT/ COMPACT**

Sheet with foam
backing (COMFORT)



19 dB - 2 m

Sheet without foam
backing (COMPACT)



8 dB - 2 m

COMPACT ACOUSTIC



15 dB - 2 m

STOCK

- 0543 Cemento
Brescia
- 0524 Cemento Capri
- 0523 Cemento Genova
- 0525 Cemento
Modena
- 0723 Charme Pecan
- 0522 Habana Trinidad
- 0538 Habana Vinales
- 0680 Infinity Greige
- 0753 Kubes Grey
- 0769 Mohair White
- 0745 Nest Metal
- 0519 Noma Beige
- 0373 Noma Ice
- 0773 Portobello
- 0763 Rice Greige

OTHER REFERENCES
available on demand
minimum order
quantity 800 sqm



Herringbone Chatain / Habana Trinidad




16.6 cm

0722 - Herringbone Blond




16.6 cm

0724 - Herringbone Chatain

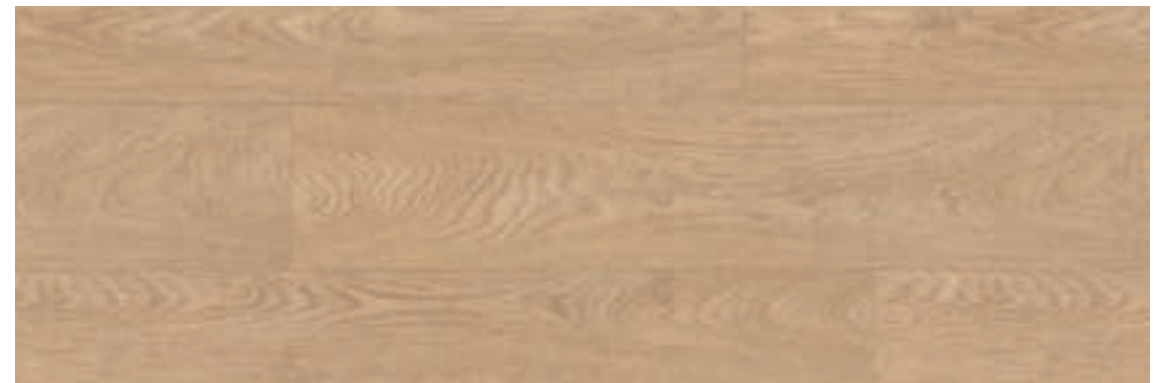

16.6 cm

0538 - Habana Vinales*

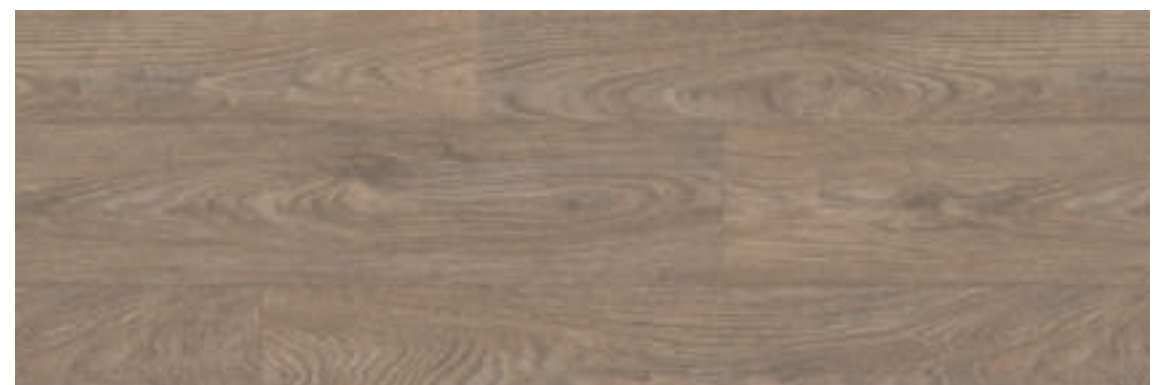


16.6 cm

0522 - Habana Trinidad*

*Reference available on stock in Compact Acoustic 15 dB -
Other references available on demand minimum order quantity 800 sqm.



0721 - Charme Natural

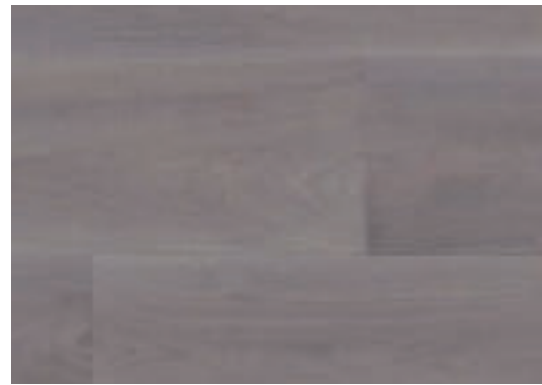

0723 - Charme Pecan*



Charme Natural





Moon Island





0760 - Moon Island



Loft Light Brown

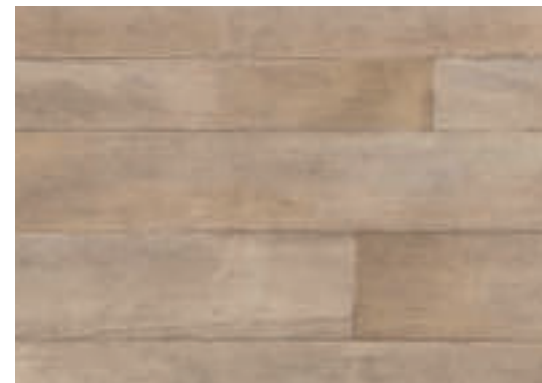


0671 - Loft Light Brown

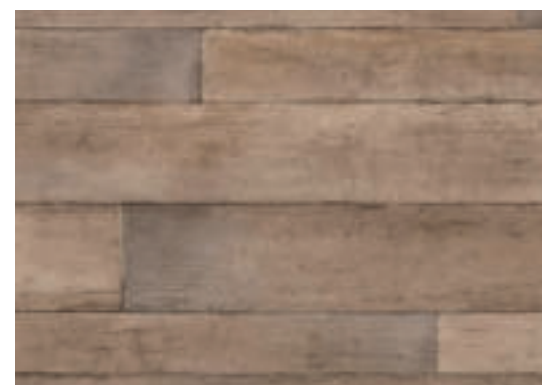

0734 - Loft Chestnut



Portobello

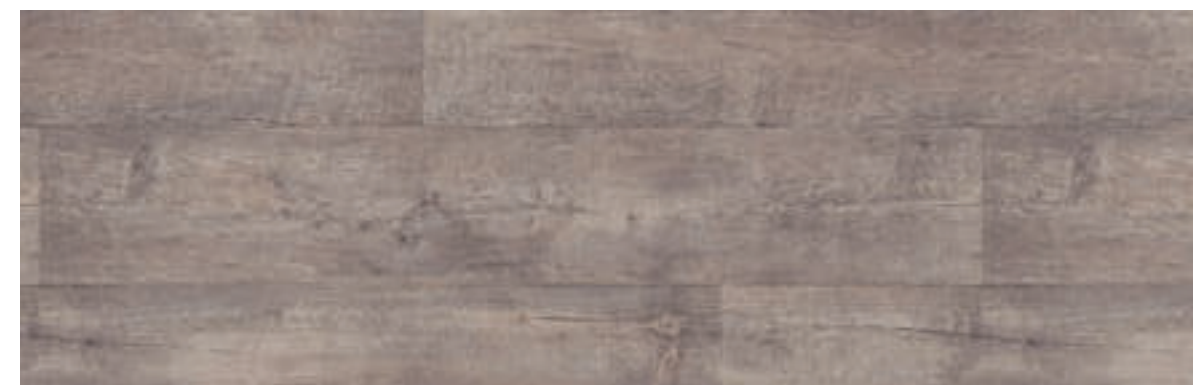

0773 - Portobello*

*Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.




0371 - Noma Rustic



0373 - Noma Ice*



0519 - Noma Beige*

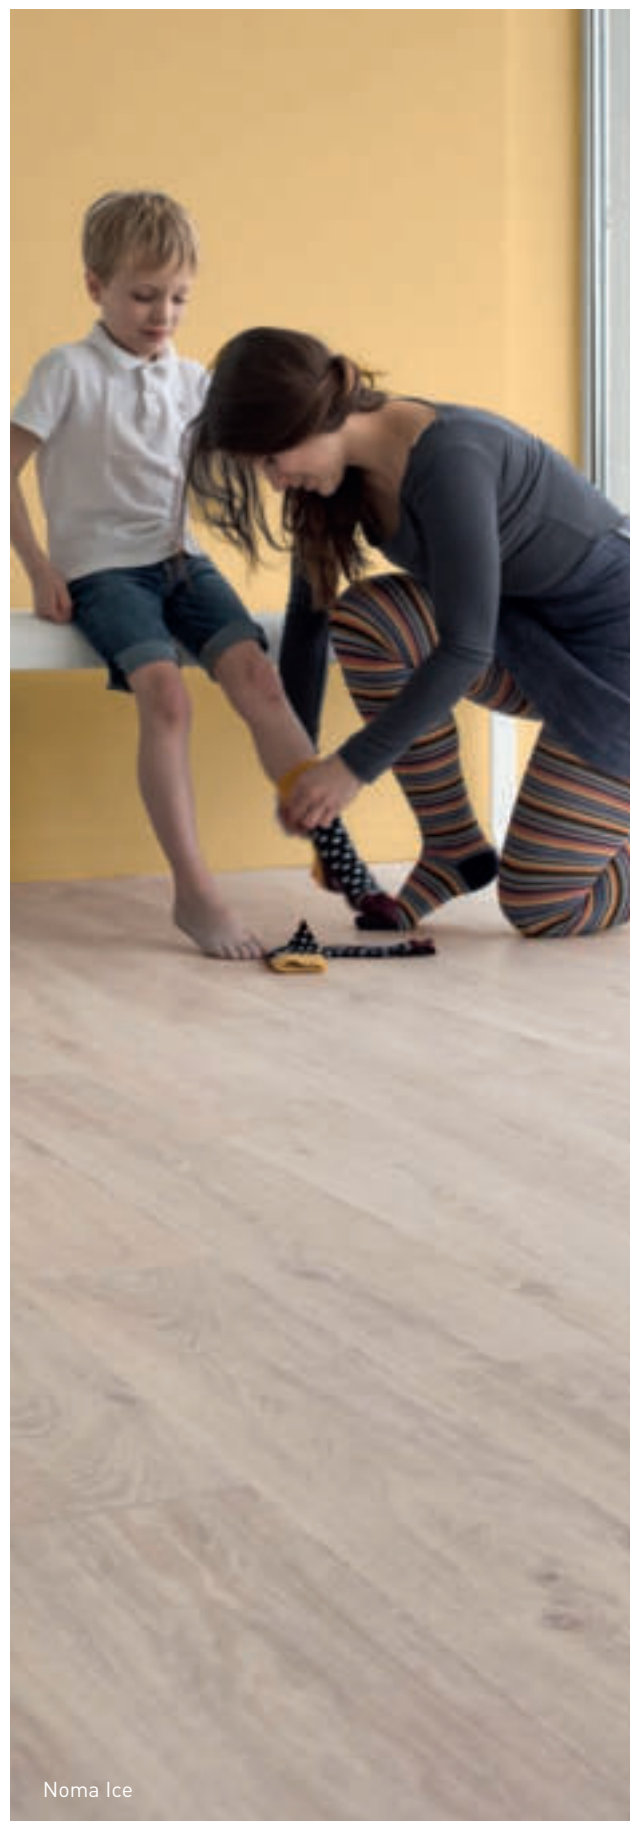

0528 - Walnut Cream



1314 - Walnut Brown



*Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.




Infinity Aube




No strip
Continuous
design

0680 - Infinity Greige*

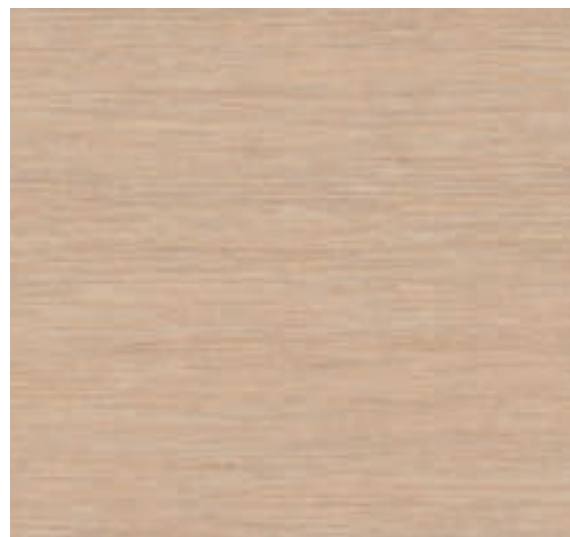

No strip
Continuous
design

0720 - Infinity Aube

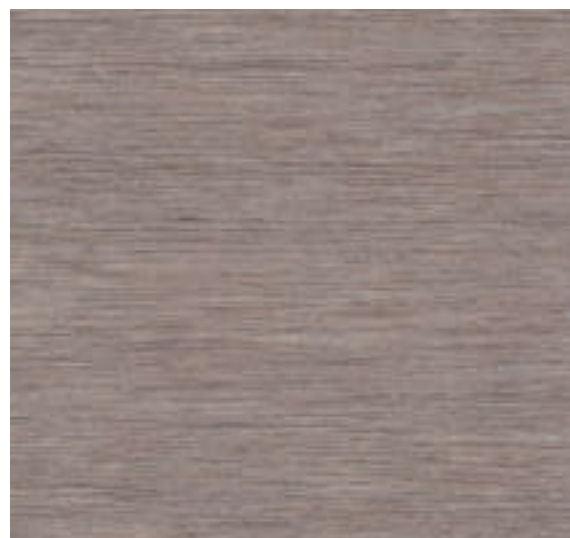


No strip
Continuous
design

0719 - Infinity Lichen




Renzo Taupe

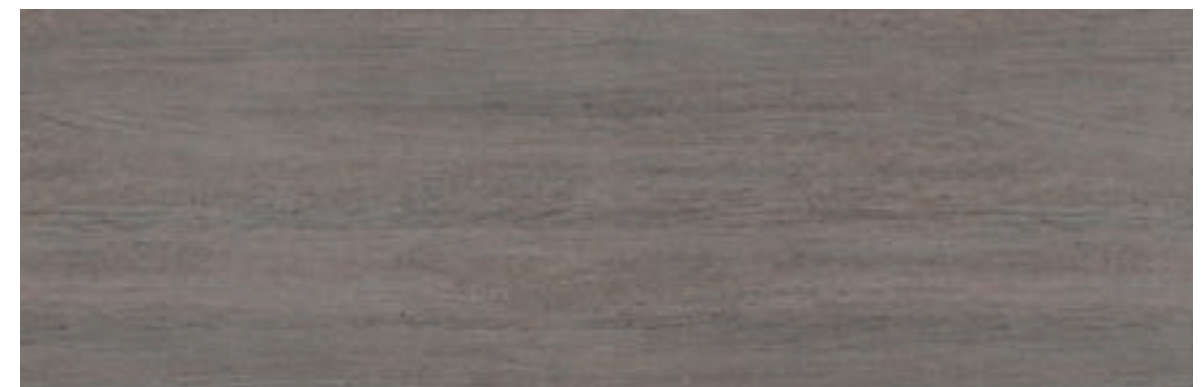

No strip
Continuous
design

0068 - Renzo Pecan

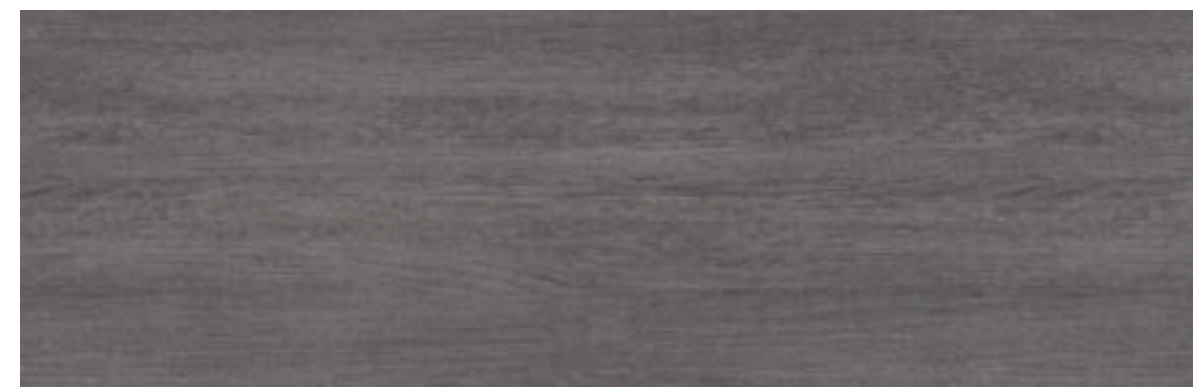


No strip
Continuous
design

0025 - Renzo Taupe




0727 - Sycamore Vanilla




No strip
Continuous
design




0726 - Sycamore Dark



No strip
Continuous
design

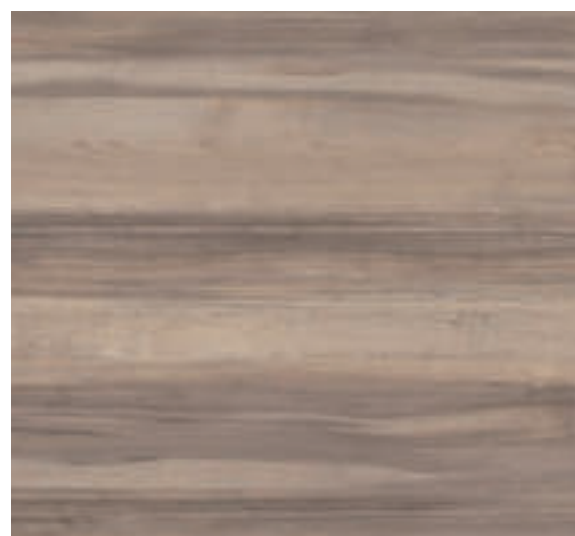

0725 - Sycamore Light Brown



No strip
Continuous
design



Sycamore Light Brown



Cemento Brescia



0523 - Cemento Genova*



0543 - Cemento Brescia*



0524 - Cemento Capri*




0525 - Cemento Modena*


*Reference available on stock in Compact Acoustic 15 dB -
Other references available on demand minimum order quantity 800 sqm.



Mohair White

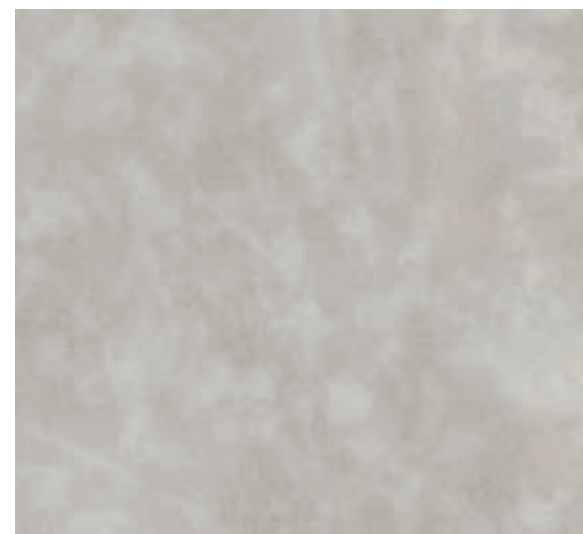

0769 - Mohair White*

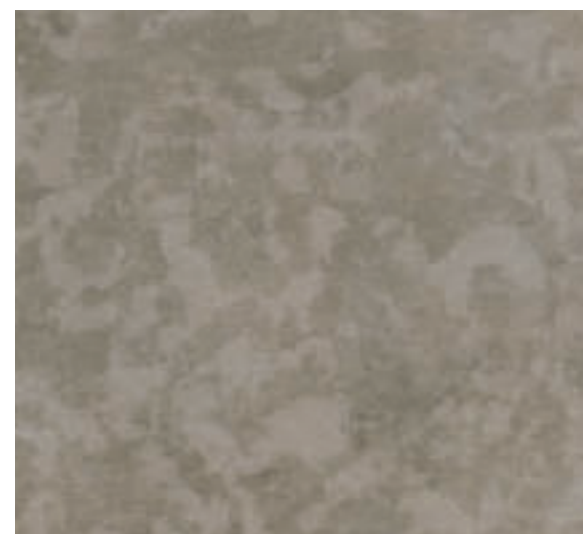

0767 - Mohair Natural



0766 - Mohair Dark




Gentlemen Grey



0770 - Gentlemen Clear



0771 - Gentlemen Grey

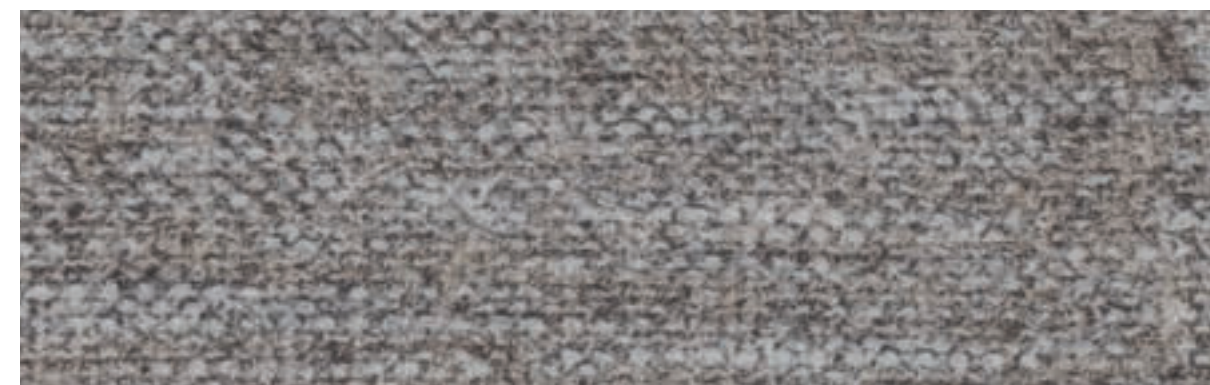

0772 - Gentlemen Coffee


*Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.



Corner Copper



0774 - Trame Clear

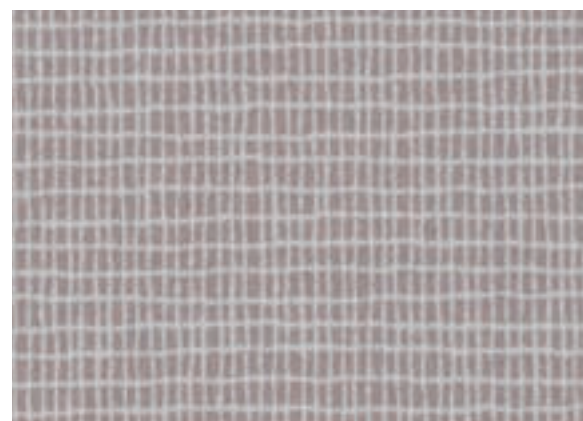

0777 - Trame Rose



0730 - Corner Light Beige




0741 - Corner Tomette




0739 - Corner Anis



0740 - Corner Turquoise

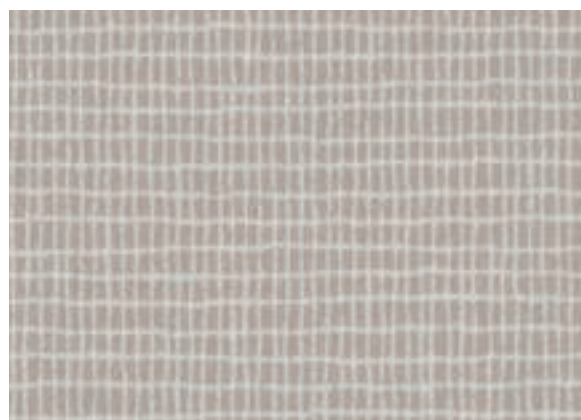

0776 - Trame Beige

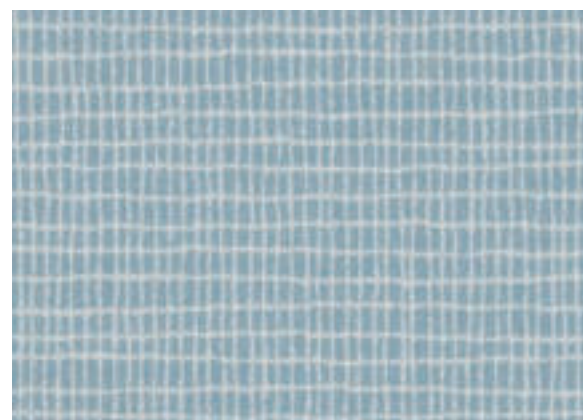

0775 - Trame Blue



0728 - Corner Offwhite



0729 - Corner Metal



0733 - Corner Copper



0732 - Corner Dark Blue



Kubes Burgundy




0755 - Kubes White



0752 - Kubes Gold



0756 - Kubes Beige



0753 - Kubes Grey*



0751 - Kubes Taupe




0747 - Kubes Olive



0750 - Kubes Sun



0749 - Kubes Sky




0754 - Kubes Blue



0748 - Kubes Burgundy



Rice Light Green



0763 - Rice Greige*



0736 - Rice Champagne



0738 - Rice Copper



0737 - Rice Souris



0759 - Rice Mustard



0762 - Rice Brown



0757 - Rice Coquelicot



0735 - Rice Light Green




0758 - Rice Sea

*Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.



0745 - Nest Metal*

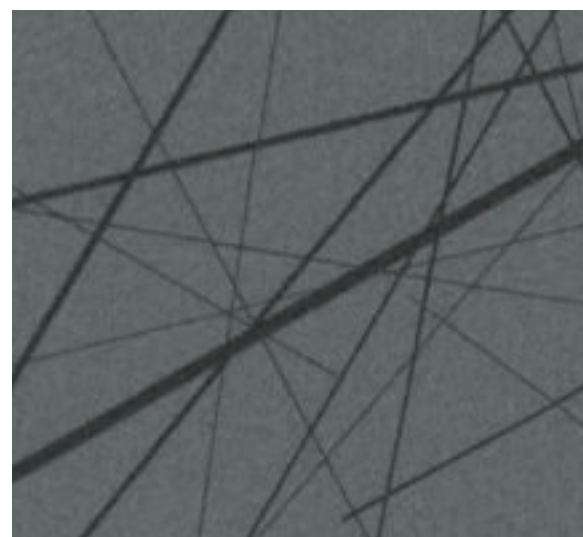

0746 - Nest Black



0765 - Nest Taupe



0764 - Stars Orange



0743 - Stars Baltique



0744 - Stars Anthracite




Leather Marine



0848 - Uni Matt White




0832 - Uni Matt Grey



0831 - Uni Matt Anthracite



0833 - Uni Matt Beige



0834 - Uni Matt Brown



0836 - Uni Matt Tomette




0849 - Uni Matt Sun



0835 - Uni Matt Orange



0840 - Uni Matt Anis



0842 - Uni Matt Olive




0839 - Uni Matt Turquoise




0837 - Uni Matt Blue



0838 - Uni Matt Dark Blue

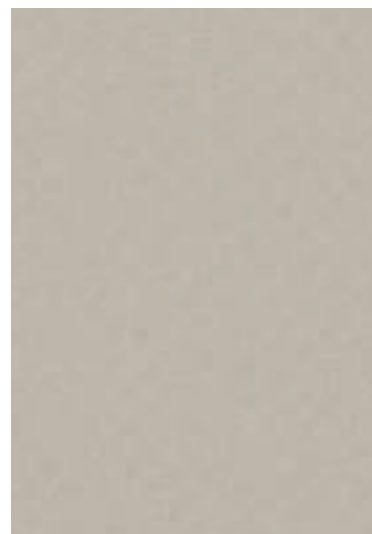


0845 - Leather Greige

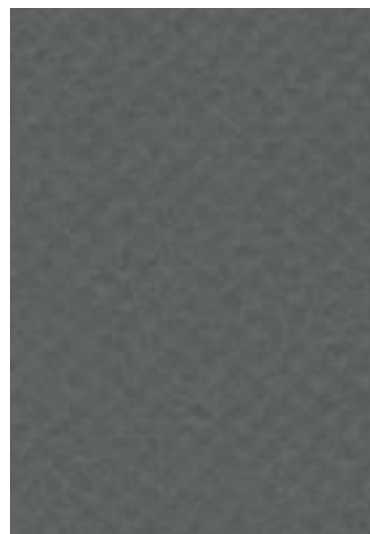

0843 - Leather Grey



0844 - Leather Marine

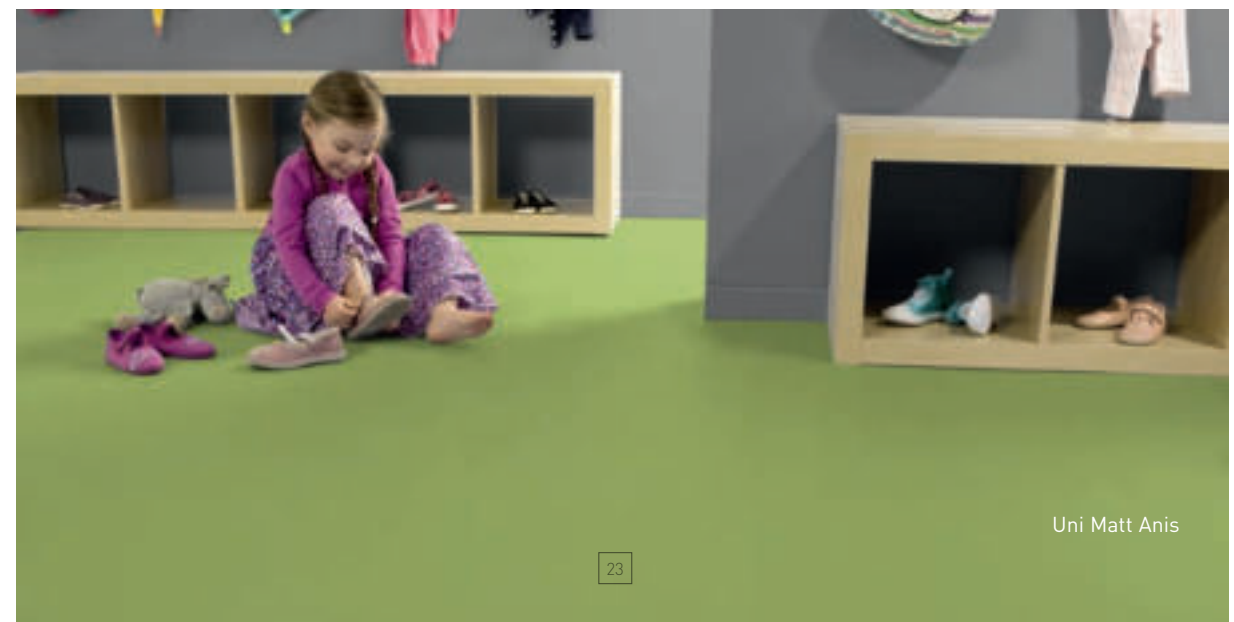

Uni Matt Anis

PROTECSOL® 2 BENEFITS

PROTECSOL® 2 technology combines all the advantages of Protecsol®, tested and approved over 20 years ago: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus **two additional benefits:**




1 STAIN SHIELD, blocks even the toughest stains



The **PROTECSOL® 2** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Eosin and Betadine, hydro-alcoholic gels, etc.), remaining on the surface.

All other product on the market let staining product penetrate the floor covering.

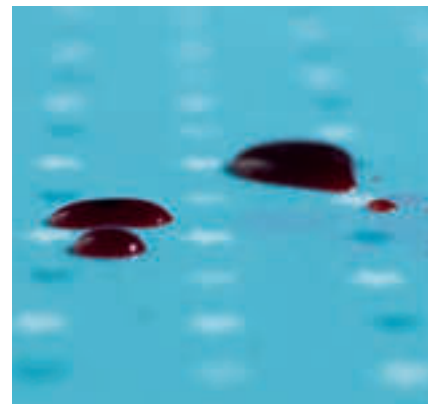

STAINING TESTS



RESULTS AFTER CLEANING

| Using a neutral detergent or an eraser for marker | TARALAY IMPRESSION | Printed flooring / transparent wearlayer | Homogeneous flooring | Coated flooring | Rubber flooring |
|---|--------------------|--|----------------------|-----------------|-----------------|
| After 10 min → | | | | | |
| After 1h → | | | | | |

Complete stain resistance table available on request



EASIER AND FASTER CLEANING


- High resistance to chemicals
- Less detergent and water
- Reduced cleaning time



MATT EFFECT FOR ENHANCED DESIGN

- Ultra-realistic design


2 ULTRA MATT EFFECT

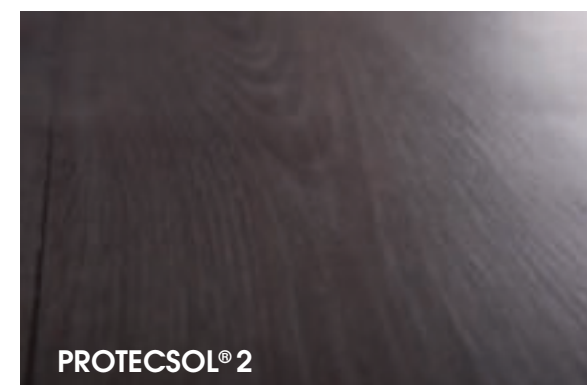

OUR PRODUCT OFFER

A SOLUTION FOR EACH NEED

WHAT IS YOUR NEED IN MATTER OF ACOUSTIC OR INDENTATION?

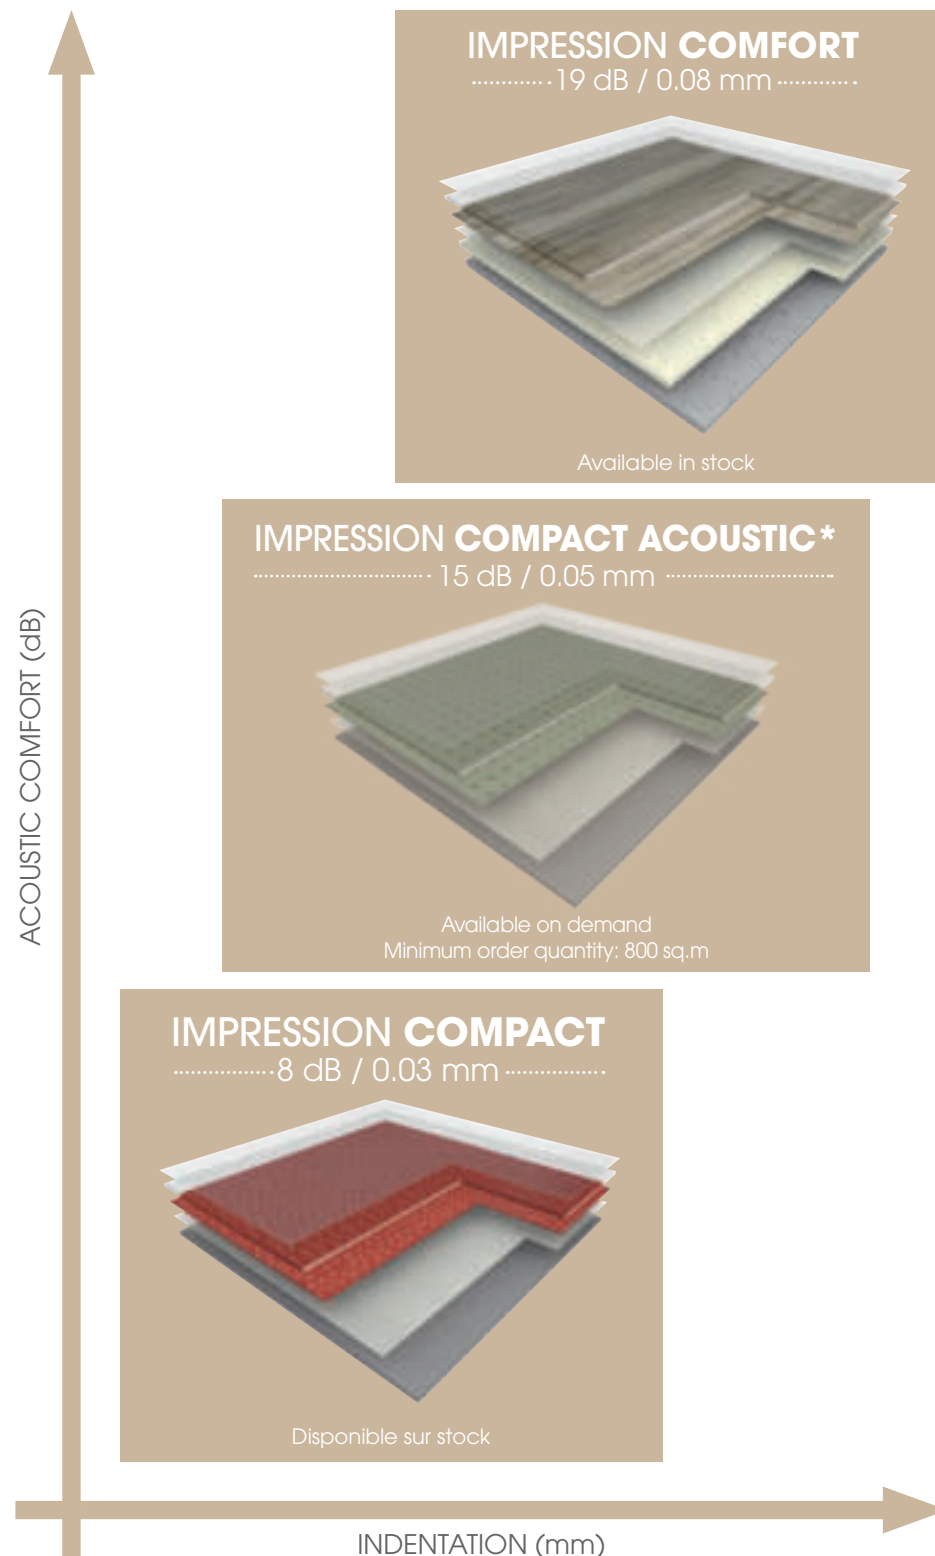

FOR ENHANCED DURABILITY

THE SOLUTION:
TARALAY IMPRESSION
**COMPACT &
COMFORT "PLUS"**

Wearlayer:
0.9 mm (see page 32)

Product available on demand
(Minimum order quantity: 800 sq.m)

***REFERENCES
TARALAY IMPRESSION
COMPACT ACOUSTIC
AVAILABLE ON STOCK**

- | | |
|----------------------|-------------------|
| 0543 Cemento Brescia | 0753 Kubes Grey |
| 0524 Cemento Capri | 0769 Mohair White |
| 0523 Cemento Genova | 0745 Nest Metal |
| 0525 Cemento Modena | 0519 Noma Beige |
| 0723 Charme Pecan | 0373 Noma Ice |
| 0522 Habana Trinidad | 0773 Portobello |
| 0538 Habana Vinales | 0763 Rice Greige |
| 0680 Infinity Greige | |

DURABILITY

NEW **TARALAY IMPRESSION** AVAILABLE WITH 2 THICKNESSES OF WEARLAYER:

1 WEARLAYER: 0.65 mm / 0.70 mm

All references available in Comfort (0.65 mm) and in Compact (0.70 mm)

- Durability of the design
- Available in stock

2 NEW WEARLAYER: 0.9 mm

(see Technical Data Sheet and product description on pages 30, 31 & 32)

- Improved durability and higher traffic resistance
- Available on demand for a minimum order quantity of 800 sq.m



IMPROVED EASE OF ROLLING




UNRIVALLED EASY ROLLING

Rolling heavy loads (stretchers, nursing care beds) can cause musculoskeletal disorders for caregivers in hospitals.

GERFLOR has developed floorcoverings which contribute to reduce the required effort by 15% when compared with competing floorings.



PUSHING FORCE REDUCED BY 15% IN COMPARISON WITH COMPETITORS*

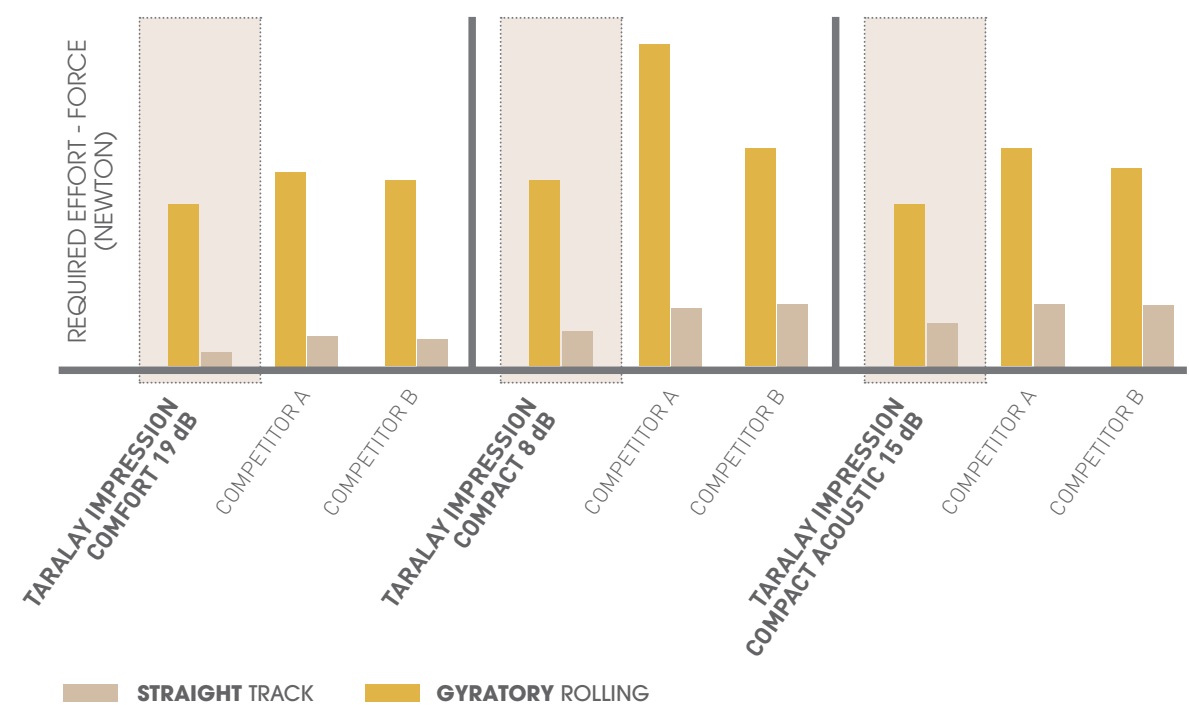

*Tests made by the company Tente®.

TECHNICAL DATA SHEET

| | TARALAY IMPRESSION Compact | TARALAY IMPRESSION Compact Plus | TARALAY IMPRESSION Comfort | TARALAY IMPRESSION Comfort Plus | TARALAY IMPRESSION Compact Acoustic |
|--|----------------------------|---------------------------------|----------------------------|---------------------------------|-------------------------------------|
|--|----------------------------|---------------------------------|----------------------------|---------------------------------|-------------------------------------|

DESCRIPTION

| | | | | | | | |
|---------------------|--------------|-------------|-------|-------|-------|-------|------|
| Total thickness | EN ISO 24346 | mm | 2.00 | 2,25 | 3.35 | 3,55 | 2.70 |
| | ASTM F386-02 | inch | 0.08 | 0.09 | 0.13 | 0.14 | 0.11 |
| Wearlayer thickness | EN ISO 24340 | mm | 0.70 | 0.90 | 0.65 | 0.90 | 0.70 |
| | ASTM F410-02 | inch | 0.028 | 0.035 | 0.026 | 0.035 | 0.03 |
| Weight | EN ISO 23997 | g/sq.m | 2635 | 2975 | 2825 | 3265 | 2790 |
| | - | lbs/sq.ft | - | - | - | - | 0.58 |
| Width of sheet | EN ISO 24341 | cm | 200 | 200 | 200 | 200 | 200 |
| | - | feet - inch | 6'6" | 6'6" | 6'6" | 6'6" | 6'6" |
| Length of sheet | EN ISO 24341 | lm | 25 | 20 | 25 | 20 | 25 |
| | - | feet - inch | 82' | 65.6' | 82' | 65.6' | 82' |

CLASSIFICATION

| | | | | | | | |
|--|--------------|-------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Norm / Product specification | - | - | EN ISO 10582 | EN ISO 10582 | EN 651 | EN 651 | EN 651 |
| European classification | EN ISO 10874 | class | 33-43 | 34-43 | 34-42 | 34-42 | 34-42 |
| Fire rating | EN 13501-1 | class | B _{fl} -s1 | C _{fl} -s1 | B _{fl} -s1 | C _{fl} -s1 | B _{fl} -s1 |
| Static electrical propensity | EN 1815 | kV | < 2 | < 2 | < 2 | < 2 | < 2 |
| Slip resistance wet : ramp test with oil | DIN 51 130 | class | R10 | R10 | R10 | R10 | R10 |

PERFORMANCE

| | | | | | | | |
|--|-----------------|-----------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Wear resistance | EN 660.2 | mm ³ | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 |
| Wear group | NF 189 | group | T | T | T | T | T |
| Type binder content | ISO 10582 | Type | I | I | - | - | - |
| Dimensional stability | EN ISO 23999 | % | ≤ 0.40 | ≤ 0.40 | ≤ 0.40 | ≤ 0.40 | ≤ 0.40 |
| Residual indentation (requirement) | EN ISO 24343-1 | mm | ≤ 0.10 | ≤ 0.10 | ≤ 0.20 | ≤ 0.20 | ≤ 0.20 |
| Residual indentation (average value measured) | - | mm | = 0,03 | = 0,03 | = 0,08 | = 0,08 | = 0,05 |
| Impact sound insulation | EN ISO 717-2 | dB | 8 | 8 | 19 | 19 | 15 |
| Castor chair test (type W) | ISO 4918 | - | OK | OK | OK | OK | OK |
| Thermal conductivity | EN ISO 10456 | W/(m.K) | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |
| Colour fastness | EN 20 105 - B02 | degree | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 | ≥ 6 |
| Surface treatment | - | - | PROTECSOL® 2 | PROTECSOL® 2 | PROTECSOL® 2 | PROTECSOL® 2 | PROTECSOL® 2 |
| Chemical products resistance ⁽¹⁾ | EN ISO 26987 | - | OK | OK | OK | OK | OK |
| Anti-bacterial activity (E. coli - S.aureus - MRSA) ⁽²⁾ | ISO 22196 | - | > 99 % Inhibits growth | > 99 % Inhibits growth | > 99 % Inhibits growth | > 99 % Inhibits growth | > 99 % Inhibits growth |
| Anti-viral activity (human coronavirus) after 2h ⁽²⁾ | ISO 21702 | - | > 99.7 % virucidal activity | > 99.7 % virucidal activity | > 99.7 % virucidal activity | > 99.7 % virucidal activity | > 99.7 % virucidal activity |

ENVIRONMENT / INDOOR AIR QUALITY

| | | | | | | | |
|--------------------|-------------|--------------------------|-------------|-------------|-------------|-------------|-------------------------|
| TVOC after 28 days | ISO 16000-6 | microgram/m ³ | < 10 | < 10 | < 10 | < 10 | < 10 |
| Certification | - | - | Floorscore® | Floorscore® | Floorscore® | Floorscore® | Floorscore® in progress |

CE MARKING

| | | | | | | | |
|----|----------|---|--|--|--|--|--|
| CE | EN 14041 | - | | | | | |
| | | | | | | | |

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2022 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.



TARALAY IMPRESSION COMFORT / COMFORT PLUS

TARALAY IMPRESSION COMFORT is an acoustic multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). It offers **19 dB sound insulation and an indentation resistance of ca. 0.08 mm.**

TARALAY IMPRESSION COMFORT PLUS is an acoustic multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating. The product comprises a Very High Density (VHD) foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.90 mm thick). It offers **19 dB sound insulation and an indentation resistance of ca. 0.08 mm.**

The flooring is equipped with **Protectsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant.

Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 microgram / m³) and this product is classified A+ (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Comfort Plus has antibacterial efficacy (E.coli / S.aureus / MRSA): > 99% after 24 hours according to ISO22196.

TARALAY IMPRESSION COMPACT / COMPACT PLUS

TARALAY IMPRESSION COMPACT is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers **8 dB sound insulation and an indentation resistance of ca. 0.03 mm.**

TARALAY IMPRESSION COMPACT PLUS is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.90 mm thick). It offers **8 dB sound insulation and an indentation resistance of ca. 0.03 mm.**

The flooring is equipped with **Protectsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant.

Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 microgram / m³) and this product is classified A+ (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): > 99% after 24 hours according to ISO22196.

TARALAY IMPRESSION COMPACT ACOUSTIC

TARALAY IMPRESSION COMPACT ACOUSTIC is a multi-layered vinyl floorcovering, available in 2m wide sheet, with a group T wear rating.

The product comprises a comfort backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers **15 dB sound insulation and an indentation resistance of ca. 0.05 mm.**

The flooring is equipped with **Protectsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is **free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB** (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant.

Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 microgram / m³) and this product is classified A+ (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): >99% after 24 hours according to ISO22196.

| DESIGN | COLOUR | CODE | NCS | LRV |
|-------------|-------------|------|-----------|------|
| CEMENTO | CAPRI | 0524 | 5010-Y30R | 21,8 |
| CEMENTO | MODENA | 0525 | 7005-Y50R | 14,0 |
| CEMENTO | BRESCIA | 0543 | 4502-Y | 32,5 |
| CEMENTO | GENOVA | 0523 | 3005-Y50R | 43,1 |
| CHARME | NATURAL | 0721 | 4005-Y20R | 33,2 |
| CHARME | PECAN | 0723 | 5502-R | 24,3 |
| CORNER | DARK BLUE | 0732 | 5030-R80B | 13,2 |
| CORNER | COPPER | 0733 | 3020-Y40R | 36,1 |
| CORNER | OFFWHITE | 0728 | 1502-Y | 66,2 |
| CORNER | METAL | 0729 | 4500-N | 59,9 |
| CORNER | LIGHT BEIGE | 0730 | 2005-Y20R | 58,8 |
| CORNER | ANIS | 0739 | 2050-G50Y | 47,0 |
| CORNER | TOMETTE | 0741 | 4030-Y90R | 17,6 |
| CORNER | TURQUOISE | 0740 | 3030-B30G | 30,4 |
| GENTLEMEN | CLEAR | 0770 | 3002-R | 46,2 |
| GENTLEMEN | GREY | 0771 | 4502-B | 34,5 |
| GENTLEMEN | COFFEE | 0772 | 5502-R | 25,4 |
| HABANA | TRINIDAD | 0522 | 5010-Y30R | 25,6 |
| HABANA | VINALES | 0523 | 3010-Y30R | 40,7 |
| HERRINGBONE | BLOND | 0722 | 3010-Y30R | 34,9 |
| HERRINGBONE | CHATAIN | 0724 | 4010-Y30R | 26,7 |
| INFINITY | AUBE | 0720 | 3010-Y30R | 47,9 |
| INFINITY | GREIGE | 0680 | 4005-Y20R | 33,1 |
| INFINITY | LICHEN | 0719 | 5005-Y20R | 26,4 |
| KUBES | OLIVE | 0747 | 5010-G10Y | 22,7 |
| KUBES | BURGUNDY | 0743 | 5030-R10B | 12,8 |
| KUBES | SKY | 0749 | 3020-B10G | 39,7 |
| KUBES | SUN | 0750 | 2050-Y10R | 48,9 |
| KUBES | TAUPE | 0751 | 5502-Y | 24,6 |
| KUBES | BEIGE | 0756 | 3010-Y30R | 44,4 |
| KUBES | GOLD | 0752 | 3010-Y30R | 40,5 |
| KUBES | GREY | 0753 | 4502-B | 27,7 |
| KUBES | BLUE | 0754 | 3040-R90B | 24,9 |
| KUBES | WHITE | 0755 | 1502-Y | 64,0 |
| LEATHER | GREY | 0843 | 6502-Y | 15,2 |
| LEATHER | MARINE | 0844 | 6020-B | 10,6 |
| LEATHER | GREIGE | 0845 | 3005-Y20R | 44,0 |
| LOFT | CHESTNUT | 0734 | 5010-Y30R | 25,9 |
| LOFT | LIGHT BROWN | 0671 | 5010-Y30R | 26,4 |
| MOHAIR | DARK | 0766 | 7000-N | 13,4 |
| MOHAIR | NATURAL | 0767 | 5005-Y20R | 26,3 |
| MOHAIR | WHITE | 0769 | 2502-Y | 48,2 |
| MOON ISLAND | - | 0760 | 4010-Y30R | 29,8 |

| DESIGN | COLOUR | CODE | NCS | LRV |
|------------|-------------|------|-----------|------|
| NEST | METAL | 0745 | 5500-N | 29,2 |
| NEST | TAUPE | 0765 | 6005-Y50R | 18,6 |
| NEST | BLACK | 0746 | 6500-N | 16,6 |
| NOMA | RUSTIC | 0371 | 4010-Y50R | 23,2 |
| NOMA | BEIGE | 0519 | 5005-Y20R | 28,5 |
| NOMA | ICE | 0373 | 2002-Y50R | 52,0 |
| PORTOBELLO | - | 0773 | 5005-Y20R | 25,3 |
| RENZO | PECAN | 0068 | 5005-Y20R | 19,4 |
| RENZO | TAUPE | 0025 | 6500-N | 16,0 |
| RICE | LIGHT GREEN | 0735 | 3020-G30Y | 42,0 |
| RICE | COQUELICOT | 0757 | 2570-Y90R | 13,8 |
| RICE | BROWN | 0762 | 6010-Y40R | 20,0 |
| RICE | CHAMPAGNE | 0736 | 4010-Y30R | 37,5 |
| RICE | SOURIS | 0737 | 5000-N | 30,1 |
| RICE | GREIGE | 0763 | 3005-Y20R | 48,5 |
| RICE | SEA | 0758 | 2040-B | 40,7 |
| RICE | MUSTARD | 0759 | 2070-Y20R | 36,6 |
| RICE | COPPER | 0738 | 4030-Y40R | 27,6 |
| STARS | ORANGE | 0760 | 1080-Y30R | 38,2 |
| STARS | BALTIQUE | 0743 | 4030-B10G | 25,9 |
| STARS | ANTHRACITE | 0744 | 7000-N | 12,8 |
| SYCAMORE | LIGHT BROWN | 0725 | 4010-Y30R | 25,6 |
| SYCAMORE | DARK | 0726 | 7502-Y | 10,5 |
| SYCAMORE | VANILLA | 0727 | 3020-Y20R | 31,1 |
| TRAME | CLEAR | 0774 | 3005-Y40R | 47,2 |
| TRAME | BLUE | 0775 | 3010-B10G | 42,8 |
| TRAME | BEIGE | 0776 | 3005-Y50R | 42,7 |
| TRAME | ROSE | 0777 | 4005-Y80R | 38,1 |
| UNI MATT | WHITE | 0848 | 1505-Y20R | 64,3 |
| UNI MATT | SUN | 0849 | 2040-Y | 55,3 |
| UNI MATT | ANIS | 0840 | 2050-G60Y | 45,9 |
| UNI MATT | GREY | 0832 | 6502-Y | 15,2 |
| UNI MATT | BEIGE | 0833 | 3010-Y30R | 45,2 |
| UNI MATT | TURQUOISE | 0839 | 3030-B40G | 31,9 |
| UNI MATT | ORANGE | 0835 | 2060-Y40R | 30,1 |
| UNI MATT | BROWN | 0834 | 5010-Y50R | 27,5 |
| UNI MATT | BLUE | 0837 | 4030-B | 25,0 |
| UNI MATT | OLIVE | 0842 | 5020-G50Y | 20,3 |
| UNI MATT | ANTHRACITE | 0831 | 7000-N | 14,2 |
| UNI MATT | TOMETTE | 0836 | 5040-Y70R | 12,4 |
| UNI MATT | DARK BLUE | 0838 | 6020-R80B | 11,1 |
| WALNUT | BROWN | 1314 | 6020-Y40R | 15,8 |
| WALNUT | CREAM | 0528 | 2005-Y40R | 53,6 |

COMPLEMENTARY RANGES

100% COORDINATION FLOORS / WALLS / FINISHES

100% SAFETY

LINEA TOUCH handrail

100% PROTECTION

Mural Ultra combined with LINEA punch bumper

100% WATERPROOF



Perfect hot-welded joint between floor and wall

100% HYGIENIC

- No area where particles or bacteria can stagnate
- Easy to clean




Patent pending system.




For further information, see the SPM and «Commercial flooring solutions» catalogues.

STAIRCASE SOLUTIONS

- Stair nosing
- 100% LANDING/STAIR HARMONY




PVC




ALU

- Complete step
- TARASTEPEP 17 dB

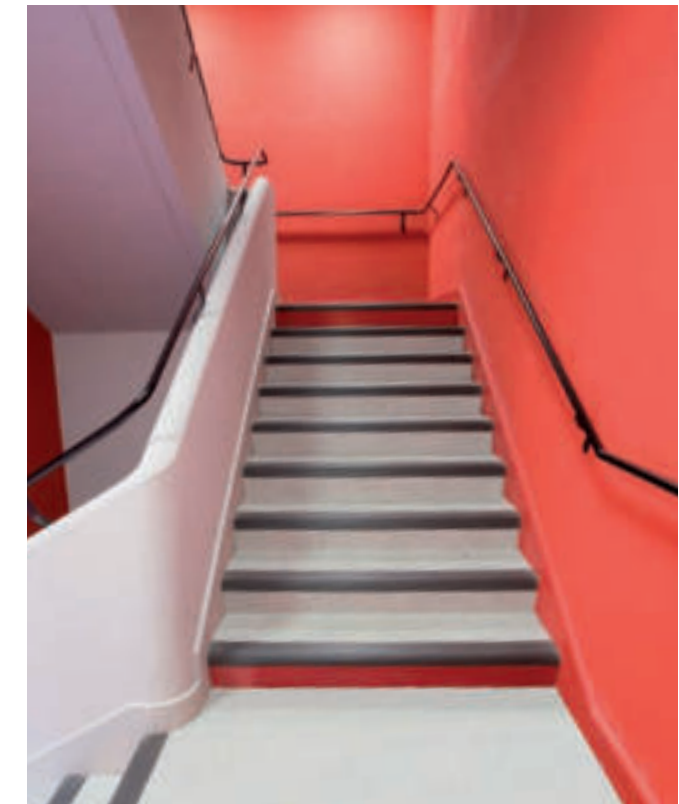

ACCESSIBILITY SOLUTIONS

- Warning strips
- Orientation strips



For further information, see the «A global solution for accessibility» brochure.

ROMUS ENTRANCE MATS

- Reduce dust
- Prevent premature soiling & wear of floor coverings



For further information, see the «Commercial flooring solutions» catalogue.

ECO-RESPONSIBLE SOLUTION

TARALAY IMPRESSION: FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION

- 100 % REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



RECYCLABILITY

- 100 % recyclable product



INDOOR AIR QUALITY

- TVOC emissions 100 times better than norms requirements (TVOC < 10 microgram/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission




LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatments ProtecSol 2 to reduce drastically the use of chemical product and water and ensure the lowest environmental impact



WELLNESS

- Health
- Anti-bacterial activity (inhibits growth > 99%)
- Anti slip R10
- Comfort: Compact version: Walking comfort < 75 dB and impact noise reduction - 8 dB
Comfort version: Walking comfort < 65 dB (best certification) and impact noise reduction - 19 dB

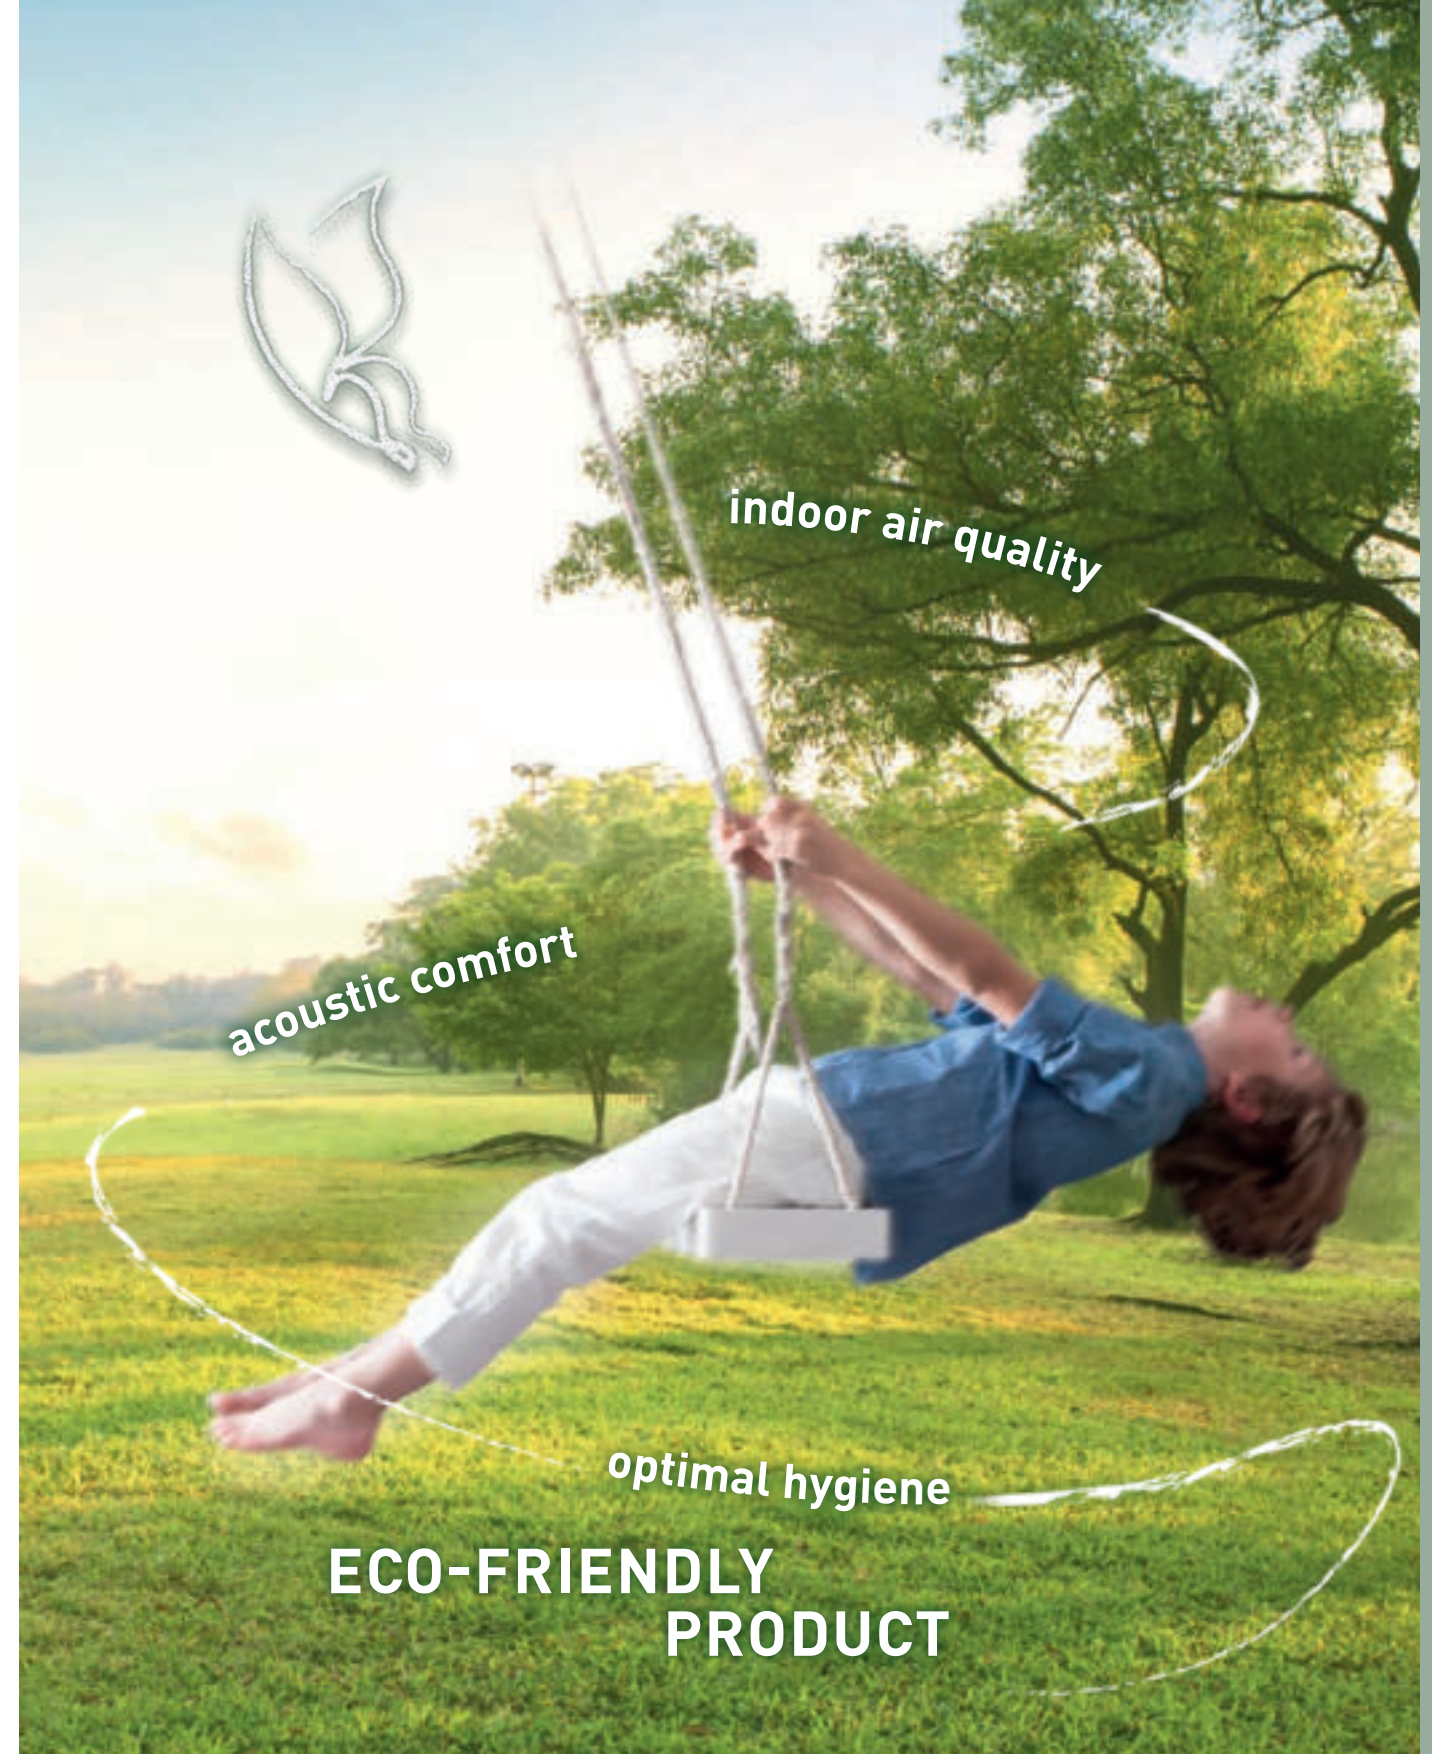

GERFLOR, THE PARTNER FOR ALL YOUR PROJECTS!



MAKE LIFE EASIER WITH OUR EXPRESS DEPARTMENT

If you have technical questions or would like to request samples or documentation, please contact:

By email: gerflorcontract@gerflor.com

By phone: **+33(0) 474 054 000**

By fax: **+33(0) 474 050 313**

TRAINING CENTRE OPEN TO ALL PROFESSIONALS

Dedicated to training young professionals and providing CPD for experienced professionals.

MADE-TO-MEASURE TECHNICAL SUPPORT

Our technicians will come to you to provide on-site support



ONLINE SERVICE

In just a few clicks, you'll find a whole range of tools to make your life easier on our web site.

WELDING ROD AND FLOORING MATCHING TOOL

https://www.gerflor.com/services_professionals/welding-rods-matching.html



VIRTUAL LIBRARY

See our documentation on line.

<https://www.gerflor.com/servicesprofessionals/virtual-library.html>

DESIGN STUDIO: REAL-TIME SIMULATIONS

Interior Designer

Choose your interior, insert your Gerflor floor covering and see the finished effect in situ on: <https://www.gerflor.com/services/professionals/interior-designer.html>




My Taralay

This GERFLOR exclusive service gives you freedom to create your own floor covering for unique interior design projects. There are up to 400,000 possible combinations on: <https://www.gerflor.com/services/professionals/mygerflor.html>



CUSTOMISED FLOORINGS, LOGOS...

Contact us for waterjet cutting



TARALAY IMPRESSION



16.6 cm

0519 - Noma Beige*



No strip
Continuous
design

0680 - Infinity Greige*



16.6 cm

0538 - Habana Vinales*



No strip
Continuous
design

0725 - Sycamore Light Brown



16.6 cm

0722 - Herringbone Blond




16.6 cm

0773 - Portobello*



16.6 cm

0522 - Habana Trinidad*

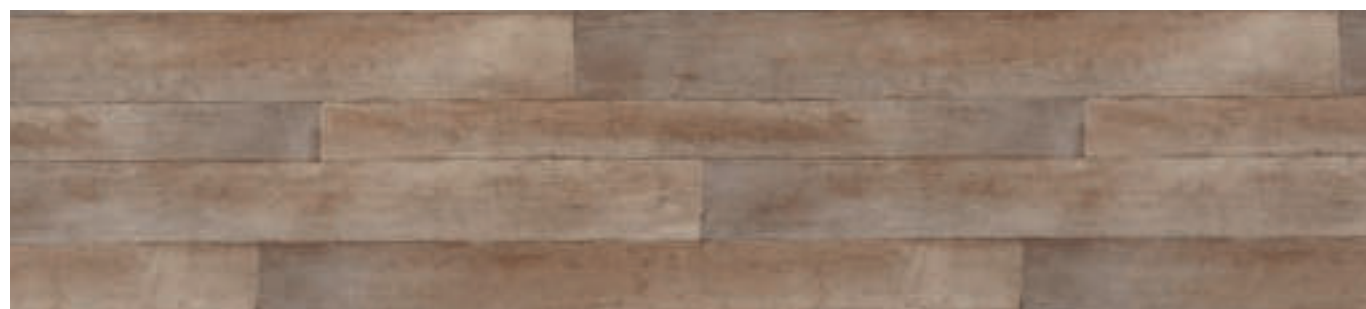

11.2 cm
14.2 cm
8.7 cm
6.4 cm

0734 - Loft Chestnut



16.6 cm

0724 - Herringbone Chatain



16.6 cm

0371 - Noma Rustic



10 cm

1314 - Walnut Brown



20 cm

0721 - Charme Natural

TARALAY IMPRESSION



0373 - Noma Ice*




0528 - Walnut Cream



0723 - Charme Pecan*




0720 - Infinity Aube




0719 - Infinity Lichen



0727 - Sycamore Vanilla




0068 - Renzo Pecan



0025 - Renzo Taupe



0760 - Moon Island



0726 - Sycamore Dark




0671 - Loft Light Brown

**Disponible en version Compact Acoustic 15 dB en stock - autres références disponibles sur commande (minimum 800 m²). /
Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.*

TARALAY IMPRESSION




0845 - Leather Greige

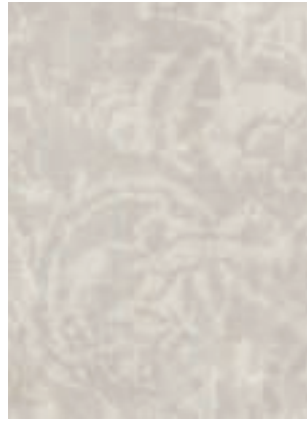


0769 - Mohair White*




0523 - Cimento Genova*

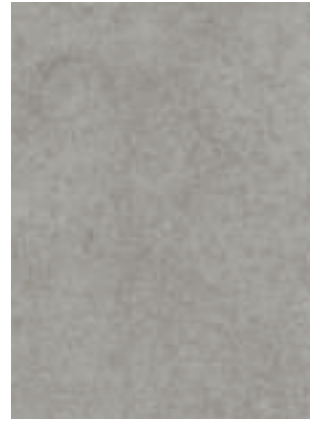


0543 - Cimento Brescia*

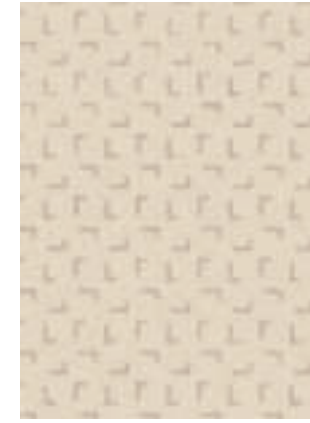

0730 - Corner Light Beige

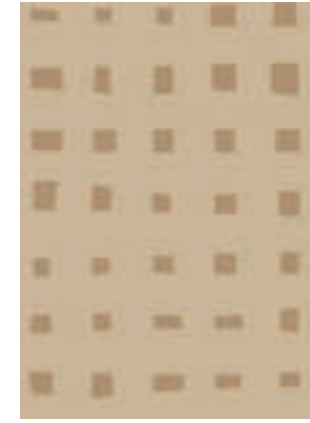


0756 - Kubes Beige

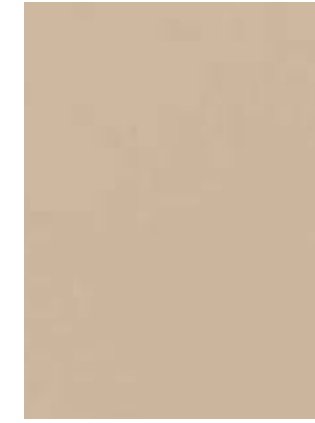

0833 - Uni Matt Beige




0736 - Rice Champagne

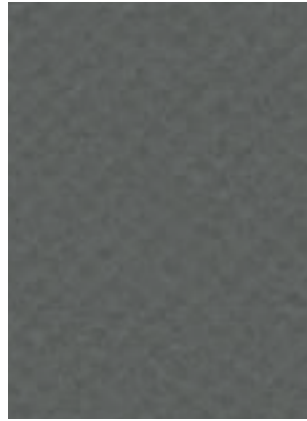


0843 - Leather Grey



0524 - Cimento Capri*

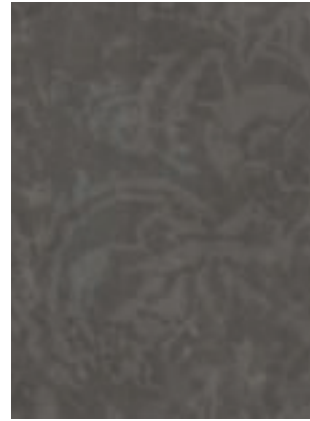


0766 - Mohair Dark

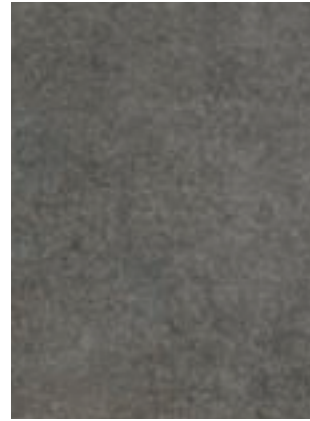

0525 - Cimento Modena*



0728 - Corner Offwhite

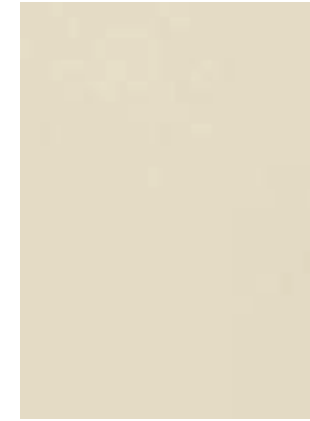


0848 - Uni Matt White



0755 - Kubes White




0763 - Rice Greige*

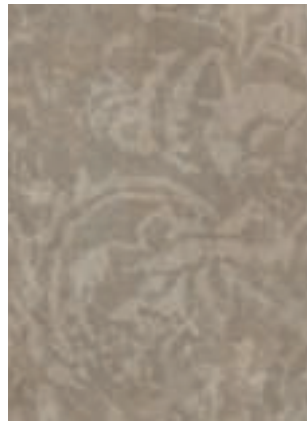

0767 - Mohair Natural



0770 - Gentlemen Clear

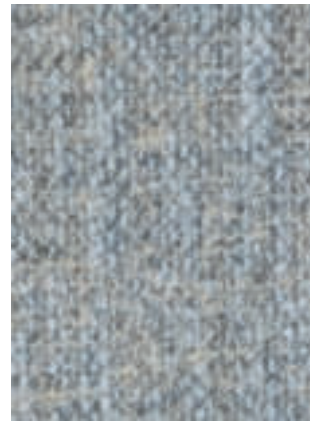

0771 - Gentlemen Grey




0772 - Gentlemen Coffee



0745 - Nest Metal*




0737 - Rice Souris

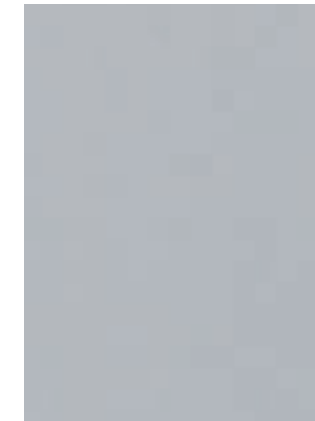


0832 - Uni Matt Grey




0729 - Corner Metal

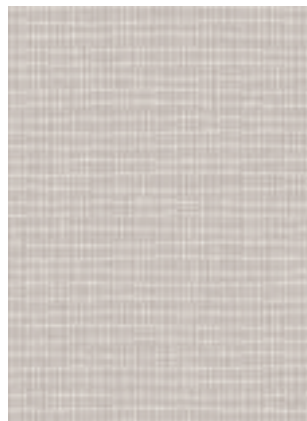


0774 - Trame Clear

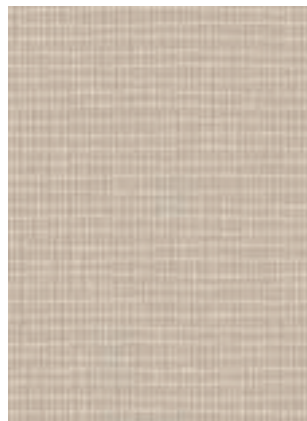


0776 - Trame Beige

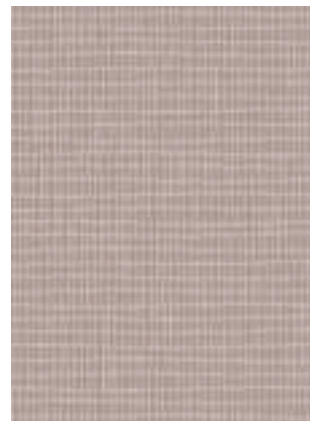

0777 - Trame Rose

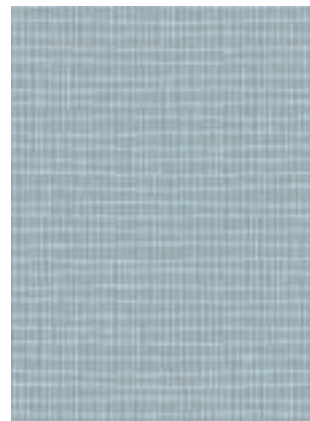


0775 - Trame Blue

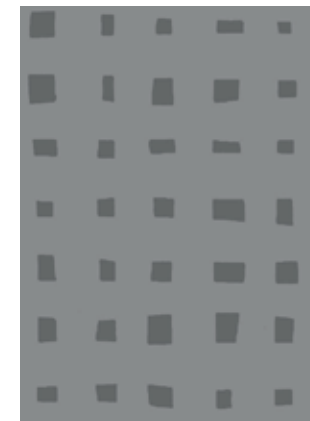

0753 - Kubes Grey*



0746 - Nest Black

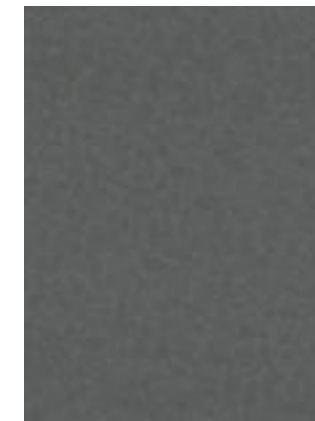

0831 - Uni Matt Anthracite




0744 - Stars Anthracite

**Disponibile en version Compact Acoustic 15 dB en stock - autres références disponibles sur commande (minimum 800 m²). /
Reference available on stock in Compact Acoustic 15 dB - Other references available on demand minimum order quantity 800 sqm.*

TARALAY IMPRESSION



0762 - Rice Brown

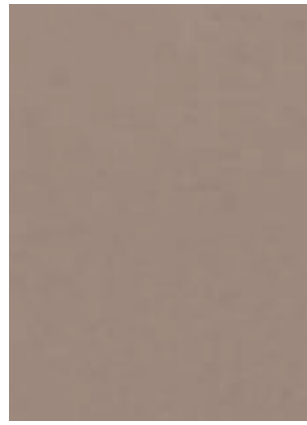


0834 - Uni Matt Brown



0765 - Nest Taupe



0751 - Kubes Taupe

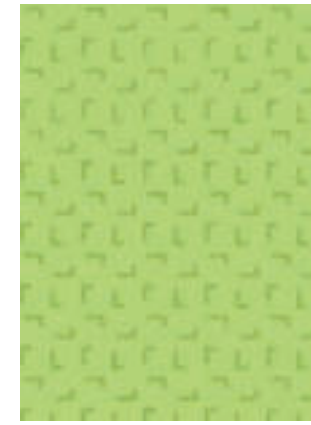

0739 - Corner Anis



0840 - Uni Matt Anis




0735 - Rice Light Green



0741 - Corner Tomette



0836 - Uni Matt Tomette

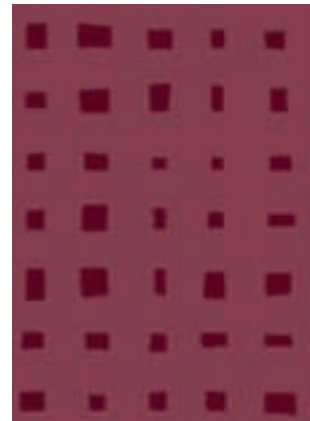

0748 - Kubes Burgundy



0757 - Rice Coquelicot



0839 - Uni Matt Turquoise




0740 - Corner Turquoise



0747 - Kubes Olive



0842 - Uni Matt Olive

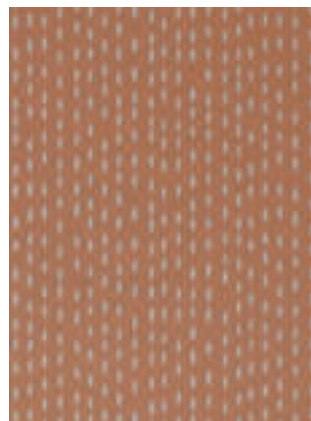

0738 - Rice Copper



0733 - Corner Copper




0752 - Kubes Gold



0759 - Rice Mustard



0758 - Rice Sea

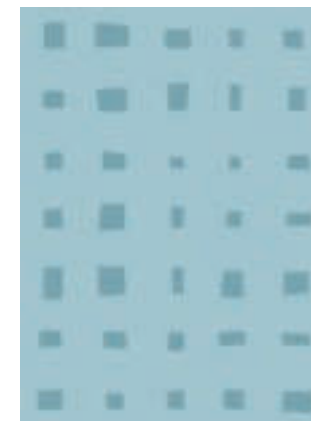

0749 - Kubes Sky



0743 - Stars Baltique



0844 - Leather Marine



0849 - Uni Matt Sun




0750 - Kubes Sun




0835 - Uni Matt Orange



0764 - Stars Orange

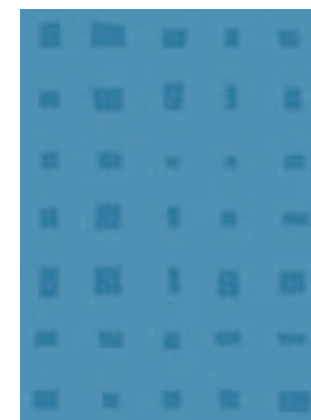

0754 - Kubes Blue

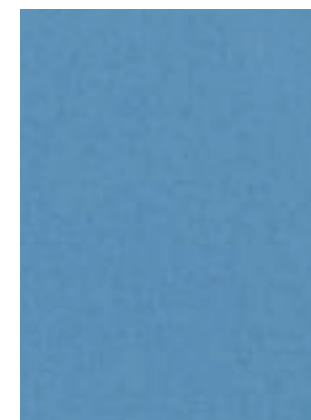

0837 - Uni Matt Blue



0732 - Corner Dark Blue



0838 - Uni Matt Dark Blue



| TARALAY IMPRESSION | | |
|--------------------|---------|------------------|
| COMPACT | COMFORT | COMPACT ACOUSTIC |

DESCRIPTION

| | | | | | |
|------------------------|--------------|-------------|------------|------------|------------|
| Total thickness | EN ISO 24346 | mm | 2.00 | 3.35 | 2.70 |
| | ASTM F386-02 | inch | 0.08 | 0.13 | 0.11 |
| Thickness of wearlayer | EN ISO 24340 | mm | 0.70 | 0.65 | 0.70 |
| | ASTM F410-02 | inch | 0.028 | 0.026 | 0.028 |
| Weight | EN ISO 23997 | g/sq.m | 2635 | 2825 | 2825 |
| | - | lbs/sq.ft | - | - | - |
| Width/length of sheet | EN ISO 24341 | cm / lm | 200 / 25 | 200 / 25 | 200 / 25 |
| | - | feet - inch | 6'6" / 82' | 6'6" / 82' | 6'6" / 82' |

CLASSIFICATION

| | | | | | |
|---|--------------|-------|---------------------|---------------------|---------------------|
| Norm/product specification | - | - | EN ISO 10582 | EN 651 | EN 651 |
| European classification | EN ISO 10874 | class | 34 - 43 | 34 - 42 | 34 - 42 |
| Fire rating | EN 13 501-1 | class | B _{fl} -s1 | B _{fl} -s1 | B _{fl} -s1 |
| Static electrical propensity | EN 1815 | kV | < 2 | < 2 | < 2 |
| Slip resistance wet: ramp test with oil | DIN 51 130 | class | R10 | R10 | R10 |

PERFORMANCES

| | | | | | |
|---|-----------------|-----------------|-----------------------------|-----------------------------|-----------------------------|
| Wear resistance | EN 660.2 | mm ³ | ≤ 2.0 | ≤ 2.0 | ≤ 2.0 |
| Wear group | - | group | T | T | T |
| Type binder content | EN ISO 10582 | Type | I | - | - |
| Dimensional stability | EN ISO 23999 | % | ≤ 0.40 | ≤ 0.40 | ≤ 0.40 |
| Residual indentation (requirement) | EN ISO 24343-1 | mm | ≤ 0.10 | ≤ 0.20 | ≤ 0.20 |
| Residual indentation (average measured value) | - | mm | ≈ 0.03 | ≈ 0.08 | ≈ 0.05 |
| Impact sound insulation | EN ISO 717-2 | dB | 8 | 19 | 15 |
| Castor chair test (type W) | ISO 4918 | - | OK | OK | OK |
| Thermal conductivity | EN ISO 10456 | W/(m.K) | 0.25 | 0.25 | 0.25 |
| Colour fastness | EN 20 105 - B02 | degree | ≥ 6 | ≥ 6 | ≥ 6 |
| Surface treatment | - | - | PROTECSOL® 2 | PROTECSOL® 2 | PROTECSOL® 2 |
| Chemical products resistance ⁽¹⁾ | EN ISO 26987 | - | OK | OK | OK |
| Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽²⁾ | ISO 22196 | - | > 99% inhibits growth | > 99% inhibits growth | > 99% inhibits growth |
| Antiviral activity (human coronavirus) after 2h ⁽²⁾ | ISO 21702 | - | > 99.7 % virucidal activity | > 99.7 % virucidal activity | > 99.7 % virucidal activity |

ENVIRONMENT / INDOOR QUALITY AIR

| | | | | | |
|--------------------|-------------|--------------------------|-------------|-------------|----------------------|
| TVOC after 28 days | ISO 16000-6 | microgram/m ³ | < 10 | < 10 | < 10 |
| Certification | - | - | Floorscore® | Floorscore® | Floorscore® en cours |

CE marking


| | | | |
|----|----------|---|--|
| CE | EN 14041 | - | |
| | | - | |

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Product description and technical data sheet available in various languages.
 See our Gerflor Country websites.

Technical data sheets and product descriptions for
TARALAY IMPRESSION COMPACT and COMFORT PLUS
 (0.9mm wearlayer) available in the Taralay Impression product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/03/2022 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

We care / We act Our Commitments for a Sustainable future



* Scopes 1 and 2 defined in the GHG protocol *** % of activity with biosourced materials ** % of activity - adhesive free solution